

MTec Hinge Basic Care

MTec uses high quality components to ensure best product possible. The hinge is designed to have superior resistance to corrosion and requires very little maintenance.


For areas that are exposed to road salt, we suggest to keep the hinges washed down after long period of exposure. When storing the trailer, please ensure the hinge is washed off and lubricated.

We suggest lubricating periodically to ensure the best performance possible. In very rare cases there may be a noise sound coming from your hinges. In this case lubricate and open and close the door a few times, until the noise disappears. For lubrication we suggest a lithium grease spray or high-quality lubrication oil. For lubrication, please refer below.

For the adjustable version. There are access holes in each side that allows you to lubricate the internals if needed. Also inspect missing or loose bolts. In the event of adjustment please visit your dealer. **DO NOT REMOVE BOLTS!**



Lubrication Point

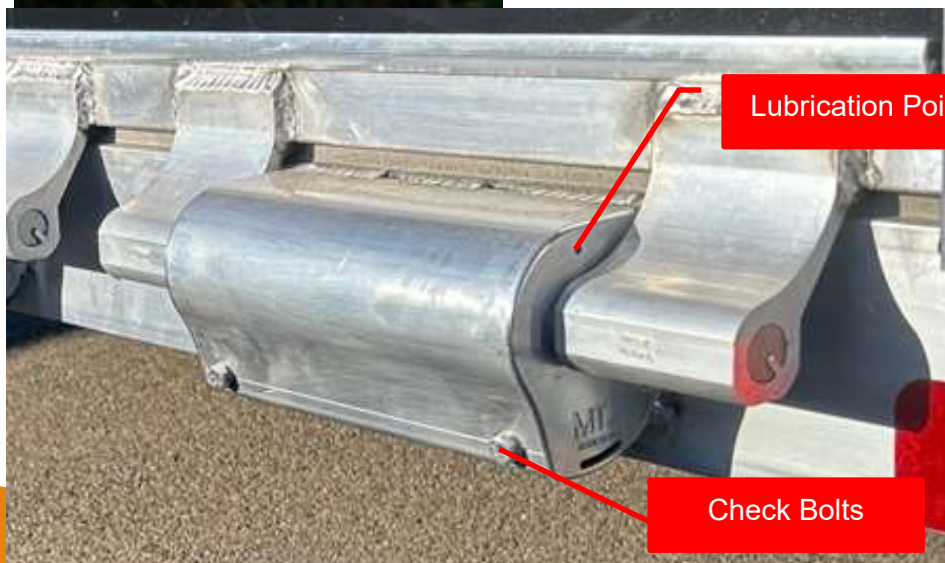

Lubrication Point

Check Bolts